




PetroBelt
The Heavy X-Heavy Oil Company

RIGS 11, 14 & 15 WITH CLOSED LOOP

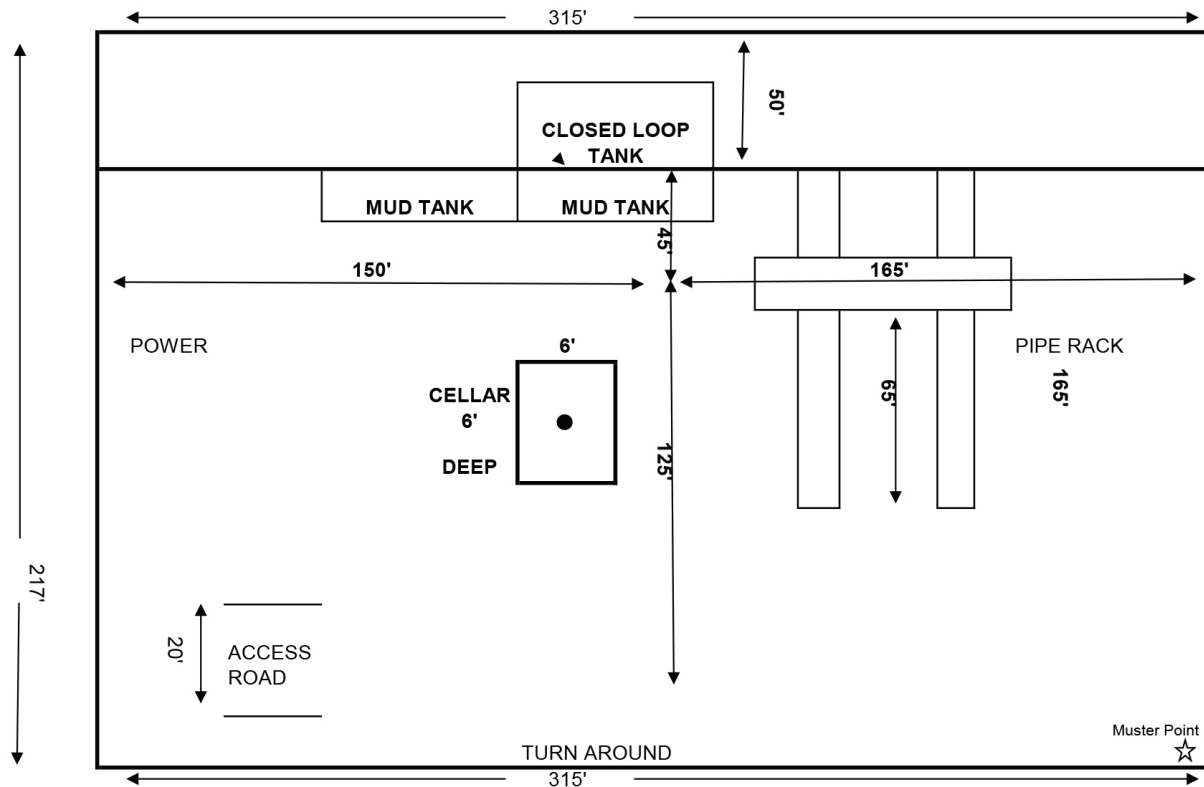

RIG 11 MOUSEHOLE 6' TO WARD PIPE RACK

Strong back: 34' to pipe racks
60'x40' 26' towards the power end
20' on each side of the well

RIG 14 MOUSE HOLE 5'1" TO PIPE RACK

Strong back 26' towards the pipe racks
63'x40' 37' towards the power end
20' on each side of the well

RIG 15 MOUSEHOLE 3' 3" FROM CENTER OF HOLE TOWARD V-DOOR

Strong back 28' towards the pipe racks
60'x40' 32' towards the power end
20' on each side of the well

ALL RIGS DITCH 2' WIDE AND 2' DEEP COMING OUT OF THE CELLAR 30' TO THE PIPE RACK AREA, 40' TO SUMP AT THE RESERVE PIT



PetroBelt

The Heavy X-Heavy Oil Company

-DRAWWORKS

Davis 1500-E (National 110 UE copy) with 2 – GE 752 DC Motors
Grooved for 1 3/8" Drill Line
WPT 235 Auxiliary Electric Brake

-DERRICK

Superior
142' High, Cantilever Mast
768,000# Static Hook Load Capacity

-SUBSTRUCTURE

Superior with 768,000# casing capacity and 500,000 # setback capacity
21' Rotary Beam Clearance
25' High Box on Box Type

-POWER SOURCE

(3) - Caterpillar 3512C's w/ 1365 KW generators
Ross Hill type 3 x 4 bay SCR House

-PUMPS

3-F-1600 Type 7 1/2" x 12" Triplex Powered by 2-752 DC Motors each - 7500 psi working system
Low Pressure Mud Mixing System with Two 6" x 5" x 11" Centrifugal Pumps w/40 HP Electric Motors

-DRILL STRING

Drill Pipe - 4 1/2" Grade S-135 / G-105 16.60, NC46
X-Hole with Hardband
Drill Collars – 6" - 6 1/2" OD NC44 with Hardband
8" - 8" OD 5"H90
Pipe Spinner: J29 Varco Chain Type

-PREVENTERS

1- 13 5/8" Hydril type Annular wp 5000 psi
1- Schaffer style 13 5/8" 10,000 psi Double Rams
1-Schaffer style 13 5/8" 10,000 psi Single Ram
1- 4 1/16" manual valve, 1- 4" HCR valve, 2- 2 1/16" valves and 1- 2 1/16" check valve all 10,000 psi
1- CAD Type M Series, 6 Station Closing Unit with 20 - 11 Gallon Bottles and with 150 Gallon Reserve with remote
Choke Manifold-10,000 psi 4 1/16" x 3" with Two Adjustable 3 1/16" Choke

-OTHER EQUIPMENT

350 ton Warrior Hydraulic top drive w/7500 psi circ rating
Columbia In-Sub Walking System with HPU
Crown Block – Superior – (7) 48" Sheaves,
Traveling Block – National Oilwell type 500 Ton
Weight Indicator - Type EB
Rotary - 27 1/2" x 53 1/4"
Fuel Tank with Lubester – 15,000 Gallon
50 bbl trip tank
Wireline Unit - .092 Line
Mud Tanks – Two Tank System, Round Bottom, 750 BBL with 5 Electric Agitators Plus 105 BBL Slugging Tank
Shakers – 3 x Derrick 503 Type Linear Motion
Desander - Derrick, (2) 12" Cones with Southwest 6" x 5" x 11" Centrifugal Pump w/40 HP Electric Motor
Desilter - Derrick, (12) 4" Cones with Southwest 6" x 5" x 11" Centrifugal Pump w/40 HP Electric Motor
Degasser – Derrick Drilco type
OFI Basic Services
498 Barrel Drill Water Tank