


RIGS 11, 14 & 15 WITH CLOSED LOOP

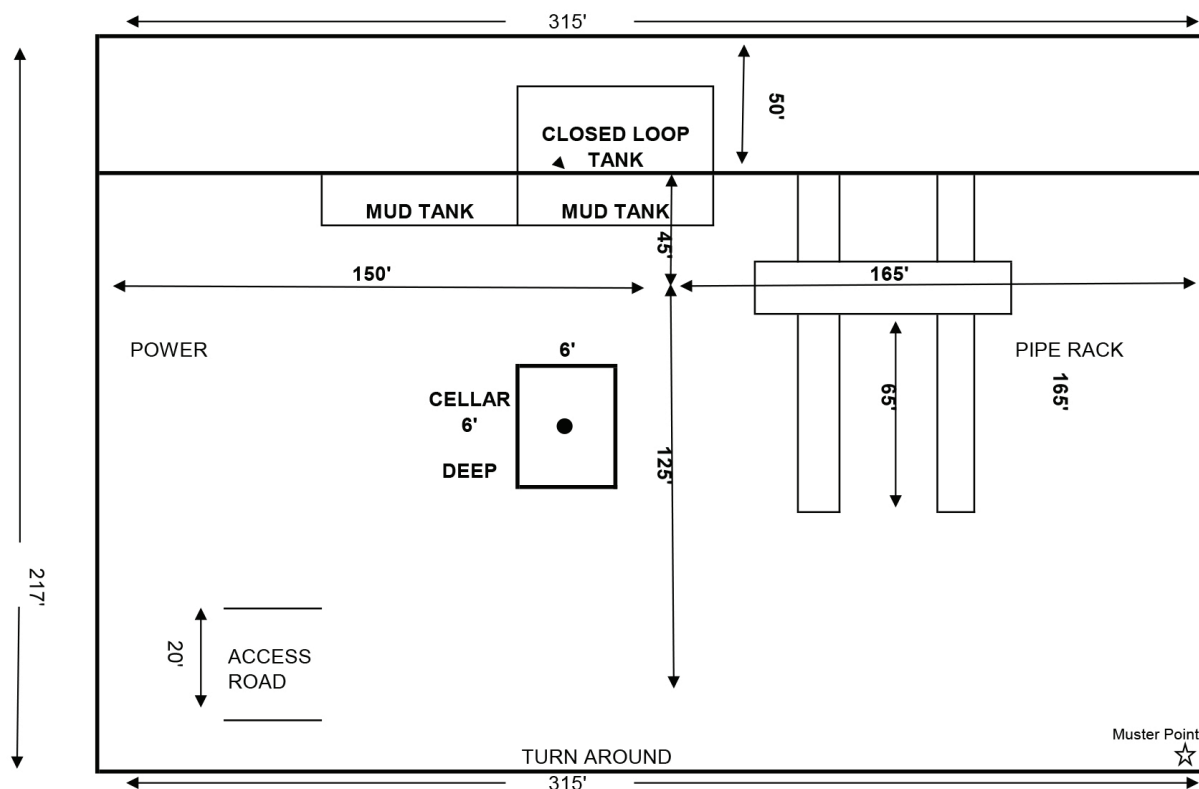

RIG 11 MOUSEHOLE 6' TO WARD PIPE RACK

Strong back: 34' to pipe racks
60'x40' 26' towards the power end
 20' on each side of the well

RIG 14 MOUSE HOLE 5'1" TO PIPE RACK

Strong back 26' towards the pipe racks
63'x40' 37' towards the power end
 20' on each side of the well

RIG 15 MOUSEHOLE 3' 3" FROM CENTER OF HOLE TOWARD V-DOOR

Strong back 28' towards the pipe racks
60'x40' 32' towards the power end
 20' on each side of the well

ALL RIGS DITCH 2' WIDE AND 2' DEEP COMING OUT OF THE CELLAR 30' TO THE PIPE RACK AREA, 40' TO SUMP AT THE RESERVE PIT



PetroBelt

The Heavy X-Heavy Oil Company

-DRAWWORKS

National 80UE with 2 – GE 752 DC Motors
Grooved for 1¼" Drill Line
6032 Auxiliary Electric Brake

-DERRICK

Full Circle
142' High, Triple Cantilever
750,000# Static Hook Load with 10 Lines

-SUBSTRUCTURE

Oklahoma Rig
16' Rotary Beam Clearance,
20' Box on Box type w 20' 7" RKB

-POWER SOURCE

(3) - Caterpillar 3512C's Tier 2 w/ 1365 KW generators
Ross Hill 4x4 SCR House

-PUMPS

(2) -Weatherford 1600HP 7" x 12" Powered by 2 - GE
752 DC Motors
Low Pressure Mud Mixing System w/Two 5" x 6" Centrif-
ugal Pump w/75 HP Electric Motors

-DRILL STRING

Drill Pipe - 4½" Grade G-105 16.60, X-Hole with Hard-
band (±14,300')
Drill Collars – 6" - 6½" OD NC44 with Hardband
7" - 7¼" OD 5" H90 with Hardband
Pipe Spinner

-PREVENTERS

(1) NL Schaffer type Spherical 11" Annular w.p. 5000 psi
(1) Shaffer Style LWS 11" 10,000 psi PS2 Space Saver
Double Rams
(1) Shaffer Style LWS 11" 10,000 psi Single Ram
(1) 5 Station with (12) 10 Gallon Bottles (2) Air Pumps
(1) Electric Triplex Pump (1) Manual
Regulator Valve (1) remote station
Choke Manifold-10,000 psi 4" x 3" with Two Adjustable
Chokes

-OTHER EQUIPMENT

250 or 350 ton hydraulic Top Drive
Crown Block – Full Circle, (5) 50" Sheaves (1) 60" FL
Sheaves
Traveling Block – 400 Ton Ideco UTB 5 Sheaves
Weight Indicator – Martin Decker Totco
Rotary – 27 ½" x 53 ¼" 275
Air Compressors – (2) Quincy QSI 120 screw type
Air Dryer- OHD
Fuel Tanks with Lubester (1) 15,000 Gallon
Wireline Unit – Mathey Model GC3-B2, .092 Line
Mud Tanks – Two Tank System, Round Bottom, 750
Barrels with 5 Electric Agitators
Shaker – (2) Brandt Type Linear Motion
Desander - Derrick, (2) 12" Cones with Mission Magnum
5" x 6" Centrifugal Pump w/75 HP Electric Motor
Desilter - Derrick, (12) 4" Cones with Mission Magnum
5" x 6" Centrifugal Pump w/75 HP Electric Motor
Degasser – Derrick Drilco type
OFI Basic Services
523 Barrel Drill Water Tank